



# VERSA<sup>™</sup>

DESIGNED SURFACES

Since 1950

## VERSA ||

Type 1

**Fabric Backed Vinyl Wallcovering**



Introducing the new Versa 15 Collection with signature and classic textures and several new exciting patterns, designed by the award winning Versa studio. These 15 oz. wallcoverings are produced in LSI's state-of-the-art facility in Suzhou, China, and are designed and manufactured to strict USA standards. With more than 60 years of experience and distribution around the world, Versa is a trusted resource for achieving your design vision.



15 OZ COLLECTION

Volume  
**2**




Kaisa




Acadia



Panama Linen

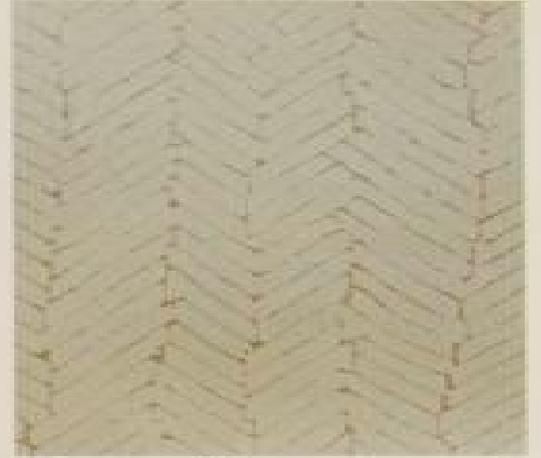

Beacon Hill

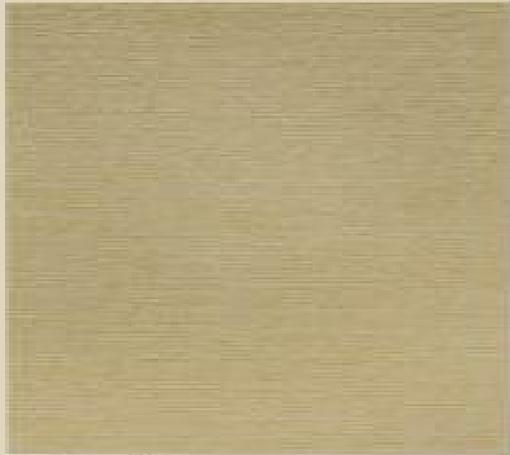

Omni Linen



Ravelle



Sonoma



Bellagio

# Kaisa



## Specifications

- Width – 52/54 in (132/137 cm)
- Backing – Osnaburg
- Installation – Reverse Hang / Radom Match
- Weight – 15 OZ/LY (340 gr/m<sup>2</sup>)
- Packing: 30 LY(37.4 m<sup>2</sup>) / Roll

## Environmental Attributes

- Low VOC meets CA01350
- Meets LEED criteria for EQc2
- Meets NSF/ANSI 342 certification; check with distributor for actual level
- Meets GB18585-2001

## Fire Resistance Attributes

- USA ASTM E84 Class A
- China GB8624 Class B1
- European EN13501 Class B1
- British BS 476 Part 6 & Part 7 Class 0



燃烧性能等级标识





**V15-201**



**V15-202**



**V15-203**



**V15-204**



**V15-205**



**V15-206**



**V15-207**

# Acadia



## Specifications

- Width – 52/54 in (132/137 cm)
- Backing – Osnaburg
- Installation – Reverse Hang / Radom Match
- Weight – 15 OZ/LY (340 gr/m<sup>2</sup>)
- Packing: 30 LY(37.4 m<sup>2</sup>) / Roll

## Environmental Attributes

- Low VOC meets CA01350
- Meets LEED criteria for EQc2
- Meets NSF/ANSI 342 certification; check with distributor for actual level
- Meets GB18585-2001

## Fire Resistance Attributes

- USA ASTM E84 Class A
- China GB8624 Class B1
- European EN13501 Class B1
- British BS 476 Part 6 & Part 7 Class 0



燃烧性能等级标识





**V15-208**



**V15-209**



**V15-210**



**V15-211**



**V15-112**



**V15-213**

# Panama Linen



## Specifications

- Width – 52/54 in (132/137 cm)
- Backing – Osnaburg
- Installation – Reverse Hang / Radom Match
- Weight – 15 OZ/LY (340 gr/m<sup>2</sup>)
- Packing: 30 LY(37.4 m<sup>2</sup>) / Roll

## Environmental Attributes

- Low VOC meets CA01350
- Meets LEED criteria for EQc2
- Meets NSF/ANSI 342 certification; check with distributor for actual level
- Meets GB18585-2001


## Fire Resistance Attributes

- USA ASTM E84 Class A
- China GB8624 Class B1
- European EN13501 Class B1
- British BS 476 Part 6 & Part 7 Class 0



燃烧性能等级标识



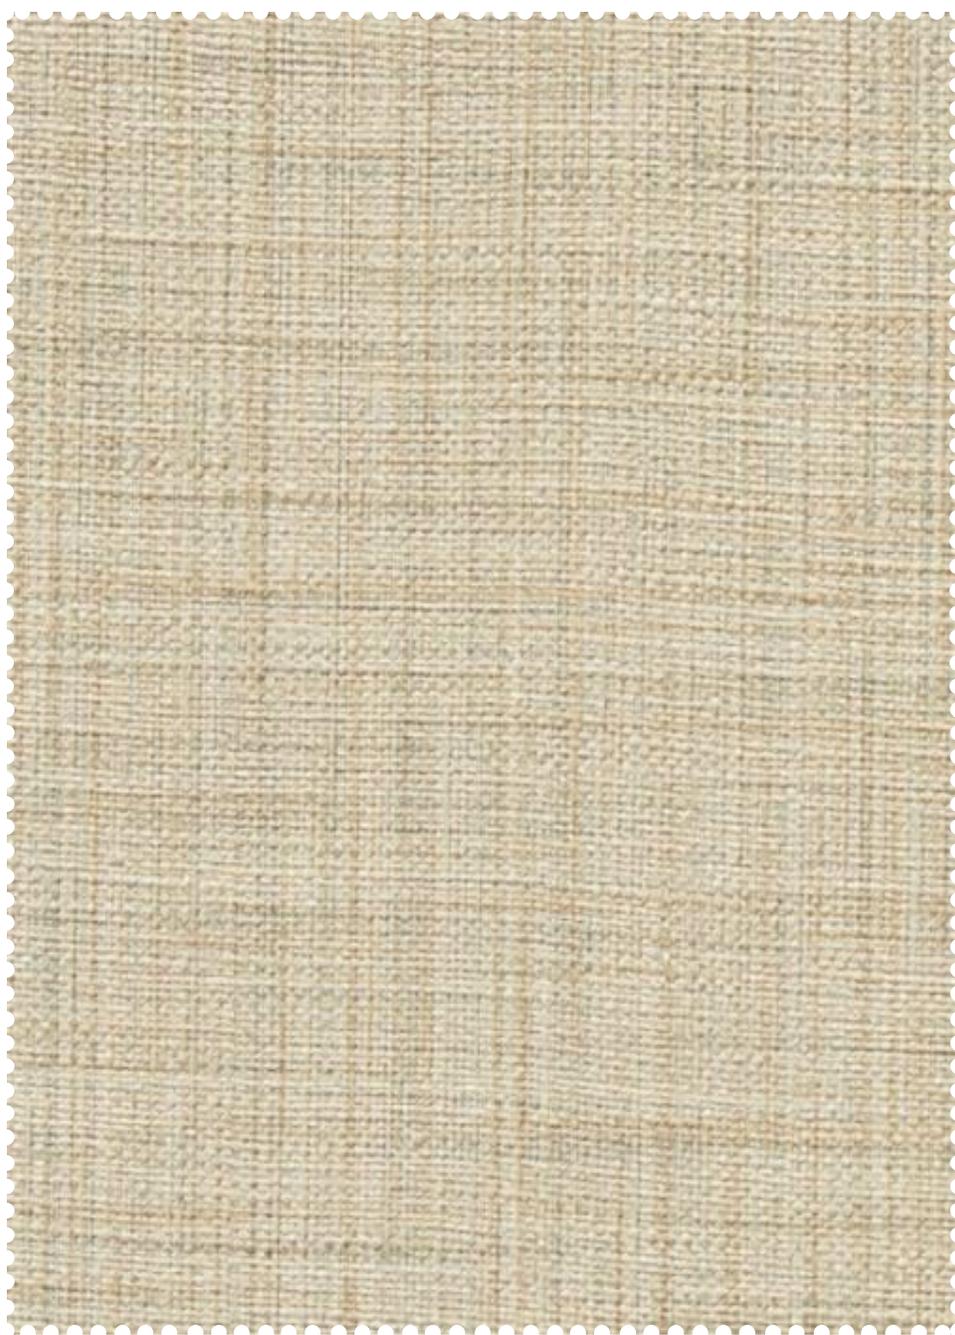

**V15-214**



**V15-215**



**V15-216**



**V15-217**



**V15-218**



**V15-219**

# Beacon Hill



## Specifications

- Width – 52/54 in (132/137 cm)
- Backing – Osnaburg
- Installation – Reverse Hang / Radom Match
- Weight – 15 OZ/LY (340 gr/m<sup>2</sup>)
- Packing: 30 LY(37.4 m<sup>2</sup>) / Roll

## Environmental Attributes

- Low VOC meets CA01350
- Meets LEED criteria for EQc2
- Meets NSF/ANSI 342 certification; check with distributor for actual level
- Meets GB18585-2001

## Fire Resistance Attributes

- USA ASTM E84 Class A
- China GB8624 Class B1
- European EN13501 Class B1
- British BS 476 Part 6 & Part 7 Class 0



燃烧性能等级标识





**V15-220**



**V15-221**



**V15-222**



**V15-223**



**V15-224**



**V15-225**



**V15-226**

# Omni Linen



## Specifications

- Width – 52/54 in (132/137 cm)
- Backing – Osnaburg
- Installation – Reverse Hang / Radom Match
- Weight – 15 OZ/LY (340 gr/m<sup>2</sup>)
- Packing: 30 LY(37.4 m<sup>2</sup>) / Roll

## Environmental Attributes

- Low VOC meets CA01350
- Meets LEED criteria for EQc2
- Meets NSF/ANSI 342 certification; check with distributor for actual level
- Meets GB18585-2001

## Fire Resistance Attributes

- USA ASTM E84 Class A
- China GB8624 Class B1
- European EN13501 Class B1
- British BS 476 Part 6 & Part 7 Class 0



燃烧性能等级标识





**V15-227**



**V15-228**



**V15-229**



**V15-230**



**V15-231**



**V15-232**

# Ravelle

## Specifications

- Width – 52/54 in (132/137 cm)
- Backing – Osnaburg
- Installation – Reverse Hang / Radom Match
- Weight – 15 OZ/LY (340 gr/m<sup>2</sup>)
- Packing: 30 LY(37.4 m<sup>2</sup>) / Roll

## Environmental Attributes

- Low VOC meets CA01350
- Meets LEED criteria for EQc2
- Meets NSF/ANSI 342 certification; check with distributor for actual level
- Meets GB18585-2001

## Fire Resistance Attributes

- USA ASTM E84 Class A
- China GB8624 Class B1
- European EN13501 Class B1
- British BS 476 Part 6 & Part 7 Class 0



燃烧性能等级标识





**V15-233**



**V15-234**



**V15-235**



**V15-236**



**V15-237**



**V15-238**

# Sonoma



## Specifications

- Width – 52/54 in (132/137 cm)
- Backing – Osnaburg
- Installation – Reverse Hang / Radom Match
- Weight – 15 OZ/LY (340 gr/m<sup>2</sup>)
- Packing: 30 LY(37.4 m<sup>2</sup>) / Roll

## Environmental Attributes

- Low VOC meets CA01350
- Meets LEED criteria for EQc2
- Meets NSF/ANSI 342 certification; check with distributor for actual level
- Meets GB18585-2001

## Fire Resistance Attributes

- USA ASTM E84 Class A
- China GB8624 Class B1
- European EN13501 Class B1
- British BS 476 Part 6 & Part 7 Class 0



燃烧性能等级标识





V15-239



V15-240



V15-241



V15-242



V15-243



V15-244

# Bellagio



## Specifications

- Width – 52/54 in (132/137 cm)
- Backing – Osnaburg
- Installation – Reverse Hang / Radom Match
- Weight – 15 OZ/LY (340 gr/m<sup>2</sup>)
- Packing: 30 LY(37.4 m<sup>2</sup>) / Roll

## Environmental Attributes

- Low VOC meets CA01350
- Meets LEED criteria for EQc2
- Meets NSF/ANSI 342 certification; check with distributor for actual level
- Meets GB18585-2001

## Fire Resistance Attributes

- USA ASTM E84 Class A
- China GB8624 Class B1
- European EN13501 Class B1
- British BS 476 Part 6 & Part 7 Class 0



燃烧性能等级标识





**V15-245**



**V15-246**



**V15-247**



**V15-248**



**V15-249**



**V15-250**

## VERSA<sup>®</sup>

Pattern Name	Pattern Number	Weight	Backing	Installation	Roll Size
Kalca	V15-201-V15-207	15oz (340 gr/m <sup>2</sup> )	Onaburg	Reverse Hang/Random Match	52" x 54" x 30 Yards
Acadia	V15-208-V15-213	15oz (340 gr/m <sup>2</sup> )	Onaburg	Straight Hang/Random Match	52" x 54" x 30 Yards
Panama Linen	V15-214-V15-219	15oz (340 gr/m <sup>2</sup> )	Onaburg	Straight Hang/Random Match	52" x 54" x 30 Yards
Beacon Hill	V15-220-V15-226	15oz (340 gr/m <sup>2</sup> )	Onaburg	Reverse Hang/Random Match	52" x 54" x 30 Yards
Olive Linen	V15-227-V15-232	15oz (340 gr/m <sup>2</sup> )	Onaburg	Straight Hang/Random Match	52" x 54" x 30 Yards
Ravella	V15-233-V15-238	15oz (340 gr/m <sup>2</sup> )	Onaburg	Reverse Hang/Random Match	52" x 54" x 30 Yards
Sonoma	V15-239-V15-244	15oz (340 gr/m <sup>2</sup> )	Onaburg	Reverse Hang/Straight-Across Match	52" x 54" x 30 Yards
Belleagio	V15-245-V15-250	15oz (340 gr/m <sup>2</sup> )	Onaburg	Reverse Hang/Random Match	52" x 54" x 30 Yards

### Specifications

- 52-54" (133/137 cm) width
- High tear and tensile strength
- Highly cleanable & stain resistant
- Color fast water-based inks
- Standard Non-ortho phthalate plasticizers
- No formaldehyde or heavy metals

### Visit [www.excelwallcovering.com](http://www.excelwallcovering.com) for technical information.

- Meets /Exceeds CCC-W-401D & W101 Specifications
- Meets BS476 Part 6/7-British Class 0
- Fire Certification - Class A - ASTM E84
- Low VOC CAD1310 (Indoor Air Quality)
- Meets BS476 Part 6/7-British Class 0
- Fire Certification-GB6969-2012-81(B-s2,d0,r0)

### Warranty

Versa products are guaranteed to be free of defects in workmanship and materials for five years.

For additional colors and patterns, please visit [www.excelwallcovering.com](http://www.excelwallcovering.com)  
 All trademarks are the property of their respective owners.



15 OZ : TYPE I  
WALLCOVERING



LSI  
WALLCOVERING

